


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY;
PLATING: GOLD FLASH over NICKEL
4. NO CONTACTS ON POS. A1 - A7
5. THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\phi 3,1 \pm 0,1$ mm; PCB-THICKNESS: 3,2mm
6. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 3024W7SAR99C60X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)		
				material: SEE NOTES		
	date	name		title: D-SUB COMBINATION FEMALE 24W7S with threaded spacer clip		
	drawn	27.01.14	Schmidt			
	appd.	27.01.14	Henneboel			
	norm					
	d-old			dwg no:	DIN-A3	
	a	Original			13K1A4563	sh: 1/2
	rev.	description			date	name

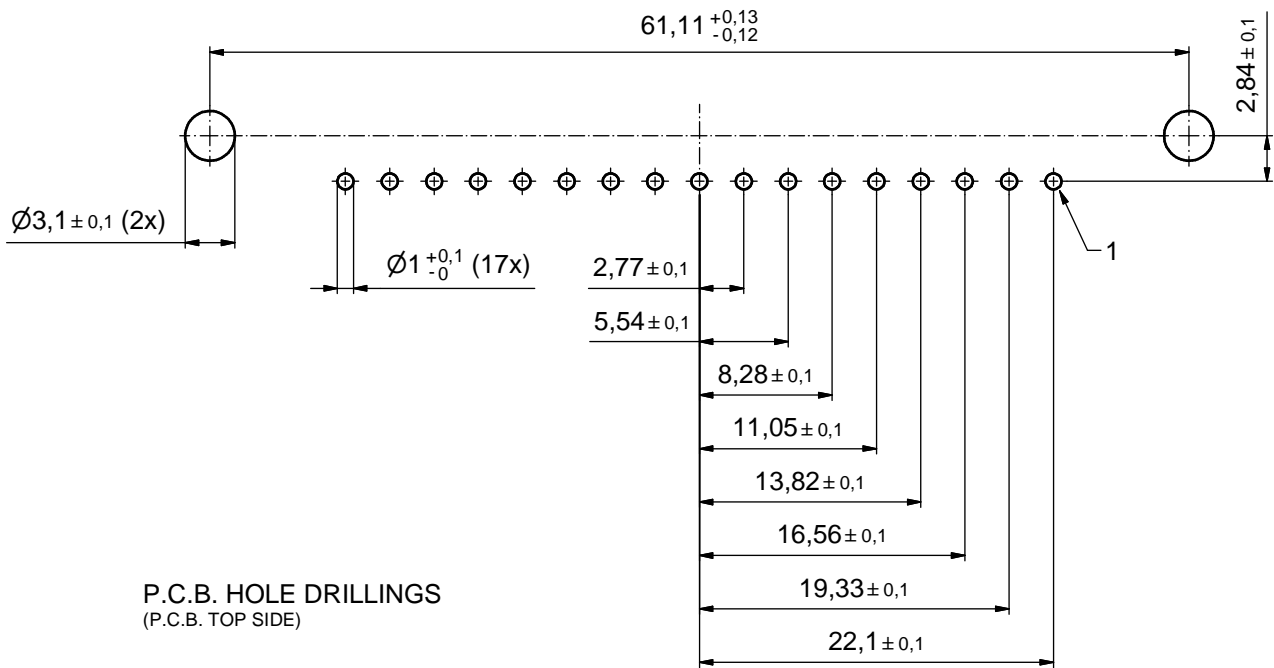

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance		scale: 3:1	
					dim. in mm		material: see sheet 1	
	rev.	description	date	name	drawn	date	name	
	a	Original			27.01.14	27.01.14	Schmidt	
					appd.		Henneboel	
					norm			
					d-old			
					title: P.C.B. HOLE DRILLINGS D-SUB COMBINATION FEMALE 24W7S with threaded spacer clip			
					dwg no: 13K1A4563			DIN-A3 sh: 2/2
					part no: SEE SHEET 1			

