


NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
4. NO CONTACTS ON POS. A1 - A4
5. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. METAL BRACKETS: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
7. PCB HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 321WA4SAU99G20X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 2:1 (5:1)	
					material: SEE NOTES	
	date	name		title: D-SUB COMB. FEMALE 90° 21WA4S with threaded insert and metal bracket		
	drawn	12.07.16	Henneboel			
	appd.	12.07.16	Lehmenkühler			
	norm					
	d-old			dwg no:		DIN-A3
	a	Original			13K1A5254	
	rev.	description	date	name	part no: 321WA4SAU99G20X	
				sh: 1/2		

PCB HOLE DRILLING
(PCB TOP SIDE)

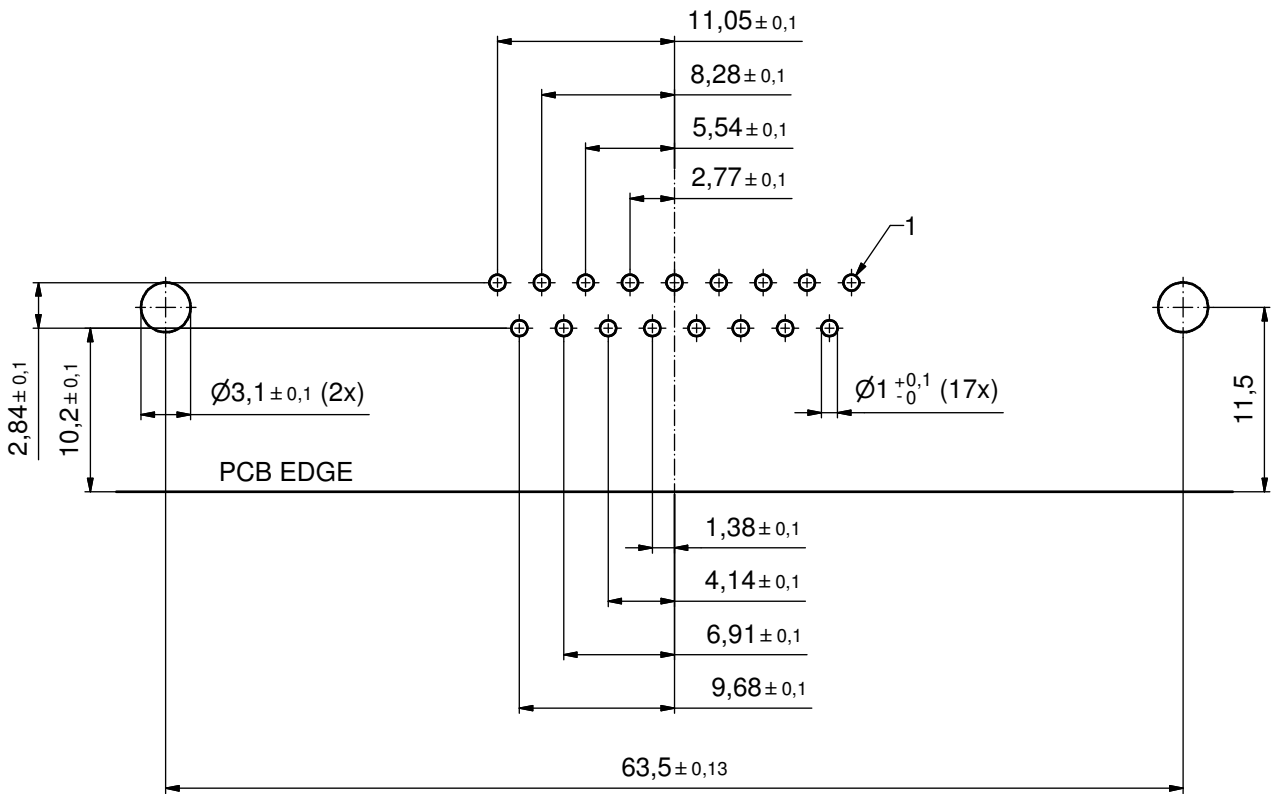

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 3:1	
				dim. in mm		material: SEE SHEET 1	
	rev.	description	date	name	date	name	title: PCB HOLE DRILLINGS D-SUB COMBINATION FEMALE 90° 21WA4S with threaded insert and metal bracket
					drawn 12.07.16	Henneboel	
					appd. 12.07.16	Lehmenkühler	
					norm		
					d-old		dwg no:
a	Original			CONEC [®]		13K1A5254	
						DIN-A3 sh: 2/2	
						part no: SEE SHEET 1	