


Cable Length L		Part Number	Max. IL
Meters	[Inches]		
1m ± 0.05m	[39.37" ± 1.97"]	17-300190-01	0.50 dB
2m ± 0.05m	[78.74" ± 1.97"]	17-300190-02	0.51 dB
3m ± 0.05m	[118.11" ± 1.97"]	17-300190-03	0.51 dB
4m ± 0.08m	[157.48" ± 3.15"]	17-300190-04	0.51 dB
5m ± 0.08m	[196.85" ± 3.15"]	17-300190-05	0.52 dB
6m ± 0.08m	[236.22" ± 3.15"]	17-300190-06	0.52 dB
7m ± 0.08m	[275.59" ± 3.15"]	17-300190-07	0.52 dB
8m ± 0.15m	[314.96" ± 5.91"]	17-300190-08	0.53 dB
9m ± 0.15m	[354.33" ± 5.91"]	17-300190-09	0.53 dB
10m ± 0.15m	[393.70" ± 5.91"]	17-300190-10	0.54 dB
11m ± 0.15m	[433.07" ± 5.91"]	17-300190-11	0.54 dB
12m ± 0.15m	[472.44" ± 5.91"]	17-300190-12	0.54 dB
13m ± 0.15m	[511.81" ± 5.91"]	17-300190-13	0.55 dB
14m ± 0.15m	[551.18" ± 5.91"]	17-300190-14	0.55 dB
15m ± 0.15m	[590.55" ± 5.91"]	17-300190-15	0.55 dB
16m ± 0.30m	[629.92" ± 11.81"]	17-300190-16	0.56 dB
17m ± 0.30m	[669.29" ± 11.81"]	17-300190-17	0.56 dB
18m ± 0.30m	[708.66" ± 11.81"]	17-300190-18	0.56 dB
19m ± 0.30m	[748.03" ± 11.81"]	17-300190-19	0.57 dB
20m ± 0.30m	[787.40" ± 11.81"]	17-300190-20	0.57 dB
21m ± 0.30m	[826.77" ± 11.81"]	17-300190-21	0.57 dB
22m ± 0.30m	[866.14" ± 11.81"]	17-300190-22	0.58 dB
23m ± 0.30m	[905.51" ± 11.81"]	17-300190-23	0.58 dB
24m ± 0.30m	[944.88" ± 11.81"]	17-300190-24	0.58 dB
25m ± 0.30m	[984.25" ± 11.81"]	17-300190-25	0.59 dB
26m ± 0.30m	[1023.62" ± 11.81"]	17-300190-26	0.59 dB
27m ± 0.30m	[1062.99" ± 11.81"]	17-300190-27	0.59 dB
28m ± 0.30m	[1102.36" ± 11.81"]	17-300190-28	0.60 dB
29m ± 0.30m	[1141.73" ± 11.81"]	17-300190-29	0.60 dB
30m ± 0.30m	[1181.10" ± 11.81"]	17-300190-30	0.61 dB
31m ± 0.30m	[1220.47" ± 11.81"]	17-300190-31	0.61 dB
32m ± 0.30m	[1259.84" ± 11.81"]	17-300190-32	0.61 dB
33m ± 0.30m	[1299.21" ± 11.81"]	17-300190-33	0.62 dB
34m ± 0.30m	[1338.58" ± 11.81"]	17-300190-34	0.62 dB
35m ± 0.35m	[1377.95" ± 13.78"]	17-300190-35	0.62 dB
36m ± 0.35m	[1417.32" ± 13.78"]	17-300190-36	0.63 dB
37m ± 0.35m	[1456.69" ± 13.78"]	17-300190-37	0.63 dB
38m ± 0.35m	[1496.06" ± 13.78"]	17-300190-38	0.63 dB
39m ± 0.35m	[1535.43" ± 13.78"]	17-300190-39	0.64 dB
40m ± 0.40m	[1574.80" ± 15.75"]	17-300190-40	0.64 dB

Cable Length L		Part Number	Max. IL
Meters	[Inches]		
41m ± 0.40m	[1614.17" ± 15.75"]	17-300190-41	0.64 dB
42m ± 0.40m	[1653.54" ± 15.75"]	17-300190-42	0.65 dB
43m ± 0.40m	[1692.91" ± 15.75"]	17-300190-43	0.65 dB
44m ± 0.40m	[1732.28" ± 15.75"]	17-300190-44	0.65 dB
45m ± 0.40m	[1771.65" ± 15.75"]	17-300190-45	0.66 dB
46m ± 0.40m	[1811.02" ± 15.75"]	17-300190-46	0.66 dB
47m ± 0.40m	[1850.39" ± 15.75"]	17-300190-47	0.66 dB
48m ± 0.40m	[1889.76" ± 15.75"]	17-300190-48	0.67 dB
49m ± 0.40m	[1929.13" ± 15.75"]	17-300190-49	0.67 dB
50m ± 0.50m	[1968.50" ± 19.69"]	17-300190-50	0.68 dB
51m ± 0.50m	[2007.87" ± 19.69"]	17-300190-51	0.68 dB
52m ± 0.50m	[2047.24" ± 19.69"]	17-300190-52	0.68 dB
53m ± 0.50m	[2208.33" ± 19.69"]	17-300190-53	0.69 dB
54m ± 0.50m	[2125.98" ± 19.69"]	17-300190-54	0.69 dB
55m ± 0.50m	[2165.35" ± 19.69"]	17-300190-55	0.69 dB
56m ± 0.50m	[2204.72" ± 19.69"]	17-300190-56	0.70 dB
57m ± 0.50m	[2244.09" ± 19.69"]	17-300190-57	0.70 dB
58m ± 0.50m	[2283.46" ± 19.69"]	17-300190-58	0.70 dB
59m ± 0.50m	[2322.83" ± 19.69"]	17-300190-59	0.71 dB
60m ± 0.60m	[2362.21" ± 23.62"]	17-300190-60	0.71 dB
61m ± 0.60m	[2401.57" ± 23.62"]	17-300190-61	0.71 dB
62m ± 0.60m	[2440.95" ± 23.62"]	17-300190-62	0.72 dB
63m ± 0.60m	[2480.31" ± 23.62"]	17-300190-63	0.72 dB
64m ± 0.60m	[2519.68" ± 23.62"]	17-300190-64	0.72 dB
65m ± 0.60m	[2559.05" ± 23.62"]	17-300190-65	0.73 dB
66m ± 0.60m	[2598.42" ± 23.62"]	17-300190-66	0.73 dB
67m ± 0.60m	[2637.80" ± 23.62"]	17-300190-67	0.74 dB
68m ± 0.60m	[2677.16" ± 23.62"]	17-300190-68	0.74 dB
69m ± 0.60m	[2716.53" ± 23.62"]	17-300190-69	0.74 dB
70m ± 0.70m	[2755.91" ± 27.56"]	17-300190-70	0.75 dB
71m ± 0.70m	[2795.28" ± 27.56"]	17-300190-71	0.75 dB
72m ± 0.70m	[2834.65" ± 27.56"]	17-300190-72	0.75 dB
73m ± 0.70m	[2874.02" ± 27.56"]	17-300190-73	0.76 dB
74m ± 0.70m	[2913.39" ± 27.56"]	17-300190-74	0.76 dB
75m ± 0.70m	[2952.76" ± 27.56"]	17-300190-75	0.76 dB
76m ± 0.70m	[2992.13" ± 27.56"]	17-300190-76	0.77 dB
77m ± 0.70m	[3031.50" ± 27.56"]	17-300190-77	0.77 dB
78m ± 0.70m	[3070.87" ± 27.56"]	17-300190-78	0.77 dB
79m ± 0.70m	[3110.24" ± 27.56"]	17-300190-79	0.78 dB
80m ± 0.80m	[3149.61" ± 31.50"]	17-300190-80	0.78 dB
200m +1.80/-0m	[7874.01" +70.86/-0"]	17-300190-200	0.78 dB
400m +2.70/-0m	[15748.03" +106.29/-0"]	17-300190-400	0.78 dB

NOTES:

1. MAXIMUM CONNECTOR INSERTION LOSS (IL): 0.5dB, PLUS CABLE ATTENUATION OF 3.5dB/km AT 850nm
2. TEST DATA PROVIDED WITH EACH ASSEMBLY

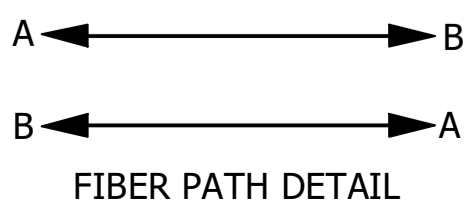

Index: c 19.11.2025 JLE		scale/Maßstab: 1:1			dwg no / Z.-nr.: 17K1A215 DIN-A2 1/1
Date/Datum: 21.04.2011 Name: Vincnet Ke drawn/gez.: J. Chaudry appd./gepr.: J. Chaudry		dim. in mm IP67 Industrial Duplex LC (ODVA) Multi Mode Fiber Optic Patch Cords, plastic version IP67 Industrial Duplex LC (ODVA) Multimode-Glasfaser-Patchkabel, Kunststoffausführung			

The reproduction, distribution and utilization of this document is strictly prohibited. All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Amphenol Conect.