used for: D-SUB COMBINATION

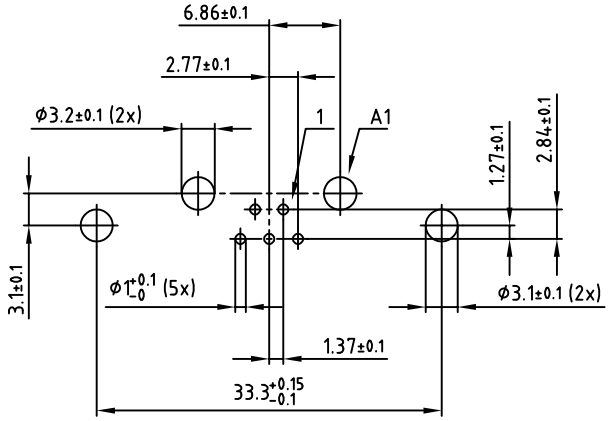

P.C.B. HOLE DRILLINGS

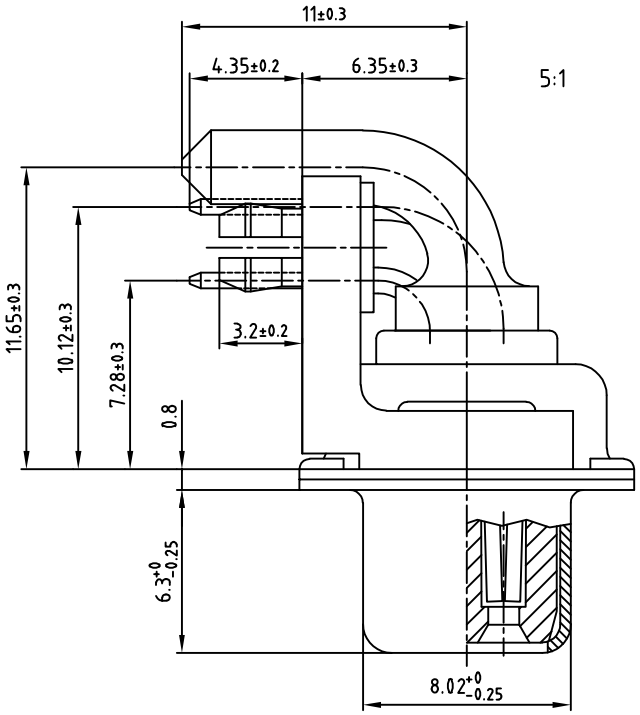

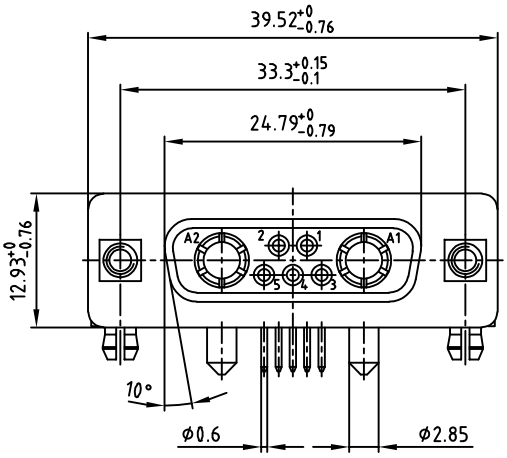

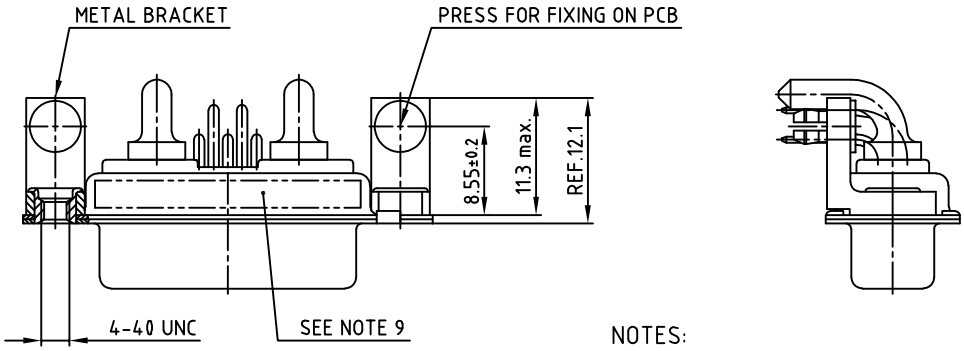

NOTES:

1. METALSHELLS: STEEL; min. 320µin TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
   PLATING: 30µin HARD GOLD OVER min. 50µin NICKEL
4. HIGH POWER CONTACTS 20A: COPPER ALLOY
   PLATING: 30µin HARD GOLD OVER min. 50µin NICKEL
5. METAL BRACKET: STEEL; min. 320µin TIN over 80µin NICKEL
6. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. PCB-SNAP: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
   PCB-HOLE: ϕ3.1±0.1; PCB THICKNESS 1.6mm
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 3007W2SCT56N40X CONEC ABC

RoHS compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

dim. in mm

	date	name
2004		
drawn	05.11.	Lehmenkühler
appd.	05.11.	Mickenbecker
norm		
d-old		

scale: 2:1 (5:1)

material: SEE NOTES

title:

D-SUB COMBINATION FEMALE 90°
7W2S
with threaded insert, metal bracket and clip

dwg no: 13K2A1141

AutoCAD 2004 | DIN-A 3 | sh: 1/1

part no: 3007W2SCT56N40X