

Technical specification:

Rated voltage: 50 V AC / 60 V DC
IEC 61076-2-104

Current rating: 4 A at 40°C
IEC 61076-2-104

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -25°C ... +95°C
EN 60512-11-10
-40°C ... +85°C
EN 60512-11-4

Mating cycles: >=100
IEC 60512-9a


Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: LCP GF, UL 94 V-0

Suitable for reflow soldering
max. 60s / 250°C

Layout proposal

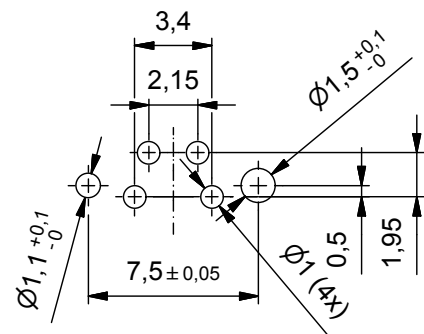

Part no. packing unit Tape & Reel:	Part no. packing unit in bulk:	Description:	Pos
42-01394TR	42-01394	SAL - 8 - IS4 / THR	4

DO NOT ALTER CAD DRAWING BY HAND RoHS & REACH compliant	Index: b 25.04.16 CS Ä6101 Change of tolerance in mating face	dim. in mm	title: Insulating body male M8x1 THR	
		date		name
		drawn	19.03.15	Gitinow
		appd.	19.03.15	Schramm
	general tolerance:	0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm * ± 5°	dwg no: 42K1A920	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			part no: see table	

