

Technical specification:

Rated voltage: 60 V
IEC 61076-2-101

Current rating: 4 A at 40°C
IEC 61076-2-101

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C
EN 60512-11-10
-40°C ... +80°C
EN 60512-11-4
UL 2238
-30°C ... +65°C




Mating cycles: >=100
IEC 60512-9a

Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: PA, UL 94 HB transparent

Sealing: FPM

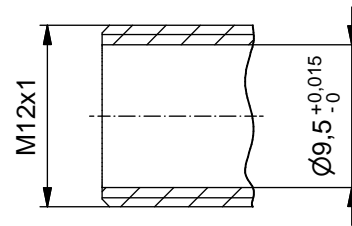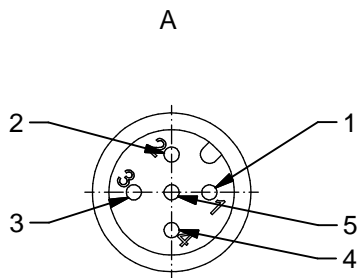


Part-no.:	Description:	Pos	Construction:
43-02278	SAL - 12 - EST5.1 - L	5	without sealing
43-02280	SAL - 12 - ESTO5.1 - L	5	with sealing

DO NOT ALTER CAD DRAWING BY HAND

RoHS & REACH compliant

Index: a 11.06.15 fro Ä5678
UL adaptation



dim.
in mm



title:

Male socket M12x1 with soldering version

dwg no:

43K1A2110

part no:



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH