

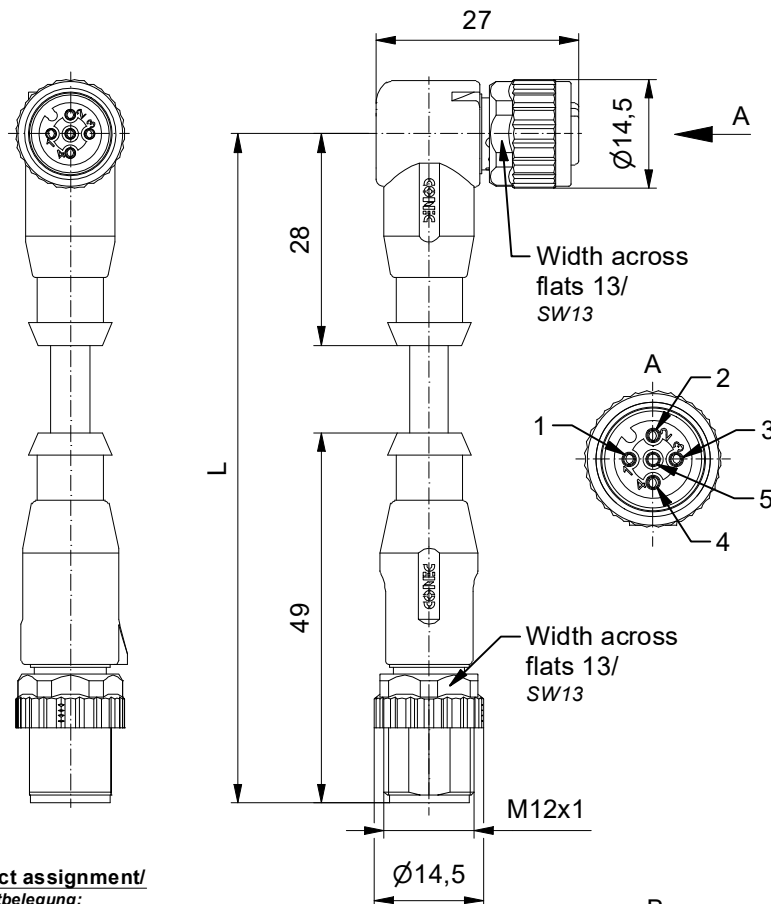


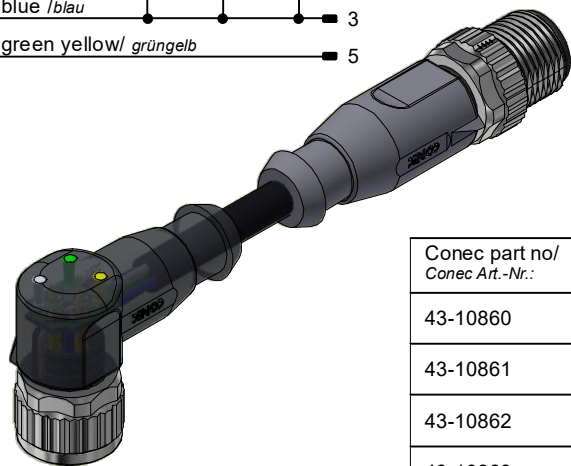

Contact assignment/ Kontaktbelegung:

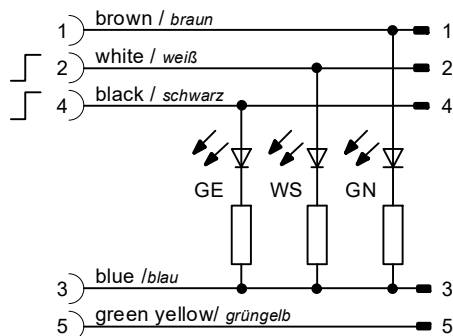

Technical specification/

Technische Daten:

Rated Voltage/ Bemessungsspannung: IEC 61076-2-101	30 V AC /30 V DC
Current rating/ Strombelastbarkeit: IEC 61076-2-101	4 A at/ bei 40 °C
Insulation resistance/ Isolationswiderstand: IEC 60512	>=100 MΩ
Pollution degree/ Verschmutzungsgrad: IEC 60664-1	3/2
Degree of protection/ Schutzart: IEC 60529	IP 67, in mated condition/ im verschraubten Zustand
Temperature range/ Umgebungstemperatur:	-30 °C ... +80 °C
Mating cycles/ Steckzyklen: IEC 60512-9a	>=100

Cable specification/

Kabeleigenschaften:

Temperatur range/ Umgebungstemperatur:	-40 °C ... +80 °C
static/fest verlegt	-25 °C ... +80 °C
flexible/bewegt	-25 °C ... +80 °C

Materials/

Werkstoffe:

Contact/ Kontakt:	CuZn, Ni b / Au 0,2 gal.
Contact carrier/ Kontaktträger:	PA, UL 94 V-0
Coupling nut/ screw/ Überwurfmutter/ -schraube:	GD-Zn, Ni
Sealing/ Dichtung:	FPM
Moulding body axial/ Griffkörper axial:	TPU, UL 94 HB, grey/ grau
Moulding body angled/ Griffkörper gewinkelt:	TPU, UL 94 HB, translucent/ transluzent

Installation specification/

Montagedaten:

Recommended torque/ empfohlenes Drehmoment:	0,6 Nm
Conec Installation tool/ Montagewerkzeug:	Torque wrench/ Drehmomentschlüssel: 36-000200 Insert across flats 13/ Steckeinsatz SW 13: 36-000220


Conec part no/ Conec Art.-Nr.:	Description/ Bezeichnung:	Length L/ Länge L:	Cable/ Kabel:
43-10860	SAL - 12 - RKW5 - RS5 - 3L - 0,3 / K1	0,3 m	TPE-U, UL 20549, black/ schwarz, 5x0,34 mm ² , Li9Y11Y Cable/Kabel: 781- K13500
43-10861	SAL - 12 - RKW5 - RS5 - 3L - 0,6 / K1	0,6 m	
43-10862	SAL - 12 - RKW5 - RS5 - 3L - 1,5 / K1	1,5 m	
43-10863	SAL - 12 - RKW5 - RS5 - 3L - 3 / K1	3 m	
43-xxxxx	SAL - 12 - RKW5 - RS5 - 3L - ... / K1	x	

tolerance of cable/
Kabeltoleranz:

L ≤ 4 m: L + 40 mm
L > 4 m: L + 1%

general tolerance/
Allgemeintoleranz:

0 ± 0,50 mm
0,0 ± 0,25 mm
0,00 ± 0,10 mm
± 5°



dim. in mm

	Date/Datum	Name
drawn/ gez.	14.03.2007	Fromm
appd./ gepr.	14.03.2007	Mankopf

Connecting cable M12x1, female connector angled
with LED - male connector axial
Verbindungsleitung M12x1,
Kupplung gewinkelt mit LED - Stecker axial

Index: b 29.09.2026 RCH

scale/Maßstab:

Amphenol
— CONEC

dwg no /
Z.-nr.: 43K1A464

DIN-
A4

1 / 1