

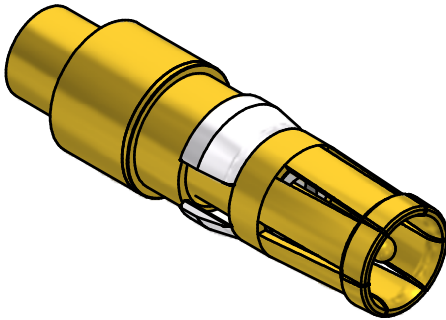


STRIPPING DIMENSIONS

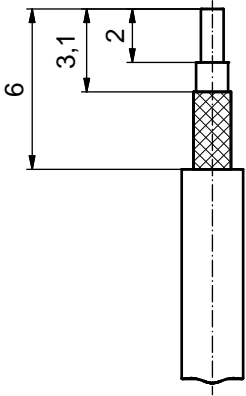

ASSEMBLY TOOLING: (b)

1. CENTER CONTACT:
SOLDERED
2. OUTER CONDUCTOR:
SOLDERED OR CRIMPED
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11019X
INSERT CAVITY B: HEX 3.25 / .128"

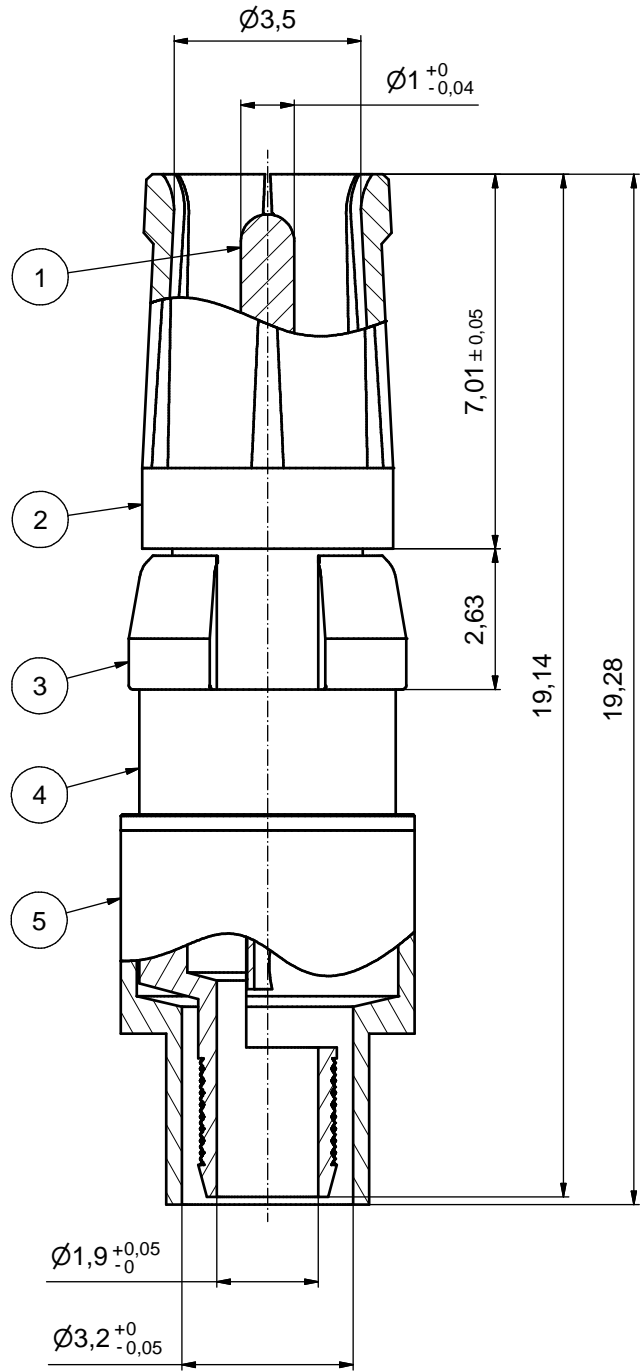

(b)

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
132A30019X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132C30019X	min. 30µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132J30019X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 10:1 (5:1)	
					material: see partlist	
	drawn	10.07.15	Henneboel	title:		
	appd.	10.07.15	Lehmenkühler	COAXIAL CONTACT SOCKET 75 OHM (b) for Cable RG 179BU, 187AU center contact solder, outer contact for crimp or solder termination		
	norm			d-old	13K2IU7B	dwg no:
4 x b	Ä5716	10.07.2015	K.H.		(b) 13K1A5012	DIN-A3
a	Original				sh: 1	
rev.	description	date	name		part no: see table	