


NOTES:

1. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY; PLATING (SEE PART-NO.):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
 - PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
4. MOUNTING BRACKET: PBT GF UL 94 V-0; BLACK
5. RIVETED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. PCB HOLE DRILLINGS ON SHEET 2
7. CONNECTOR IS PART MARKED: 163□11759X CONEC ABC (see note 3)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm		scale: 2:1 (5:1)	
					material: SEE NOTES	
	date	name	title:			
	drawn 03.06.15	Lehmenkühler	D-SUB MALE 90° 50pos. SOLDER PIN ANGLED 0.370inch with mounting bracket and riveted insert			
	appd. 03.06.15	Schmidt				
norm		dwg no:				
d-old		16K1A3662				
rev. a	Original			DIN-A3		
description	date			sh: 1		
				part no: 163□11759X (see note 3)		

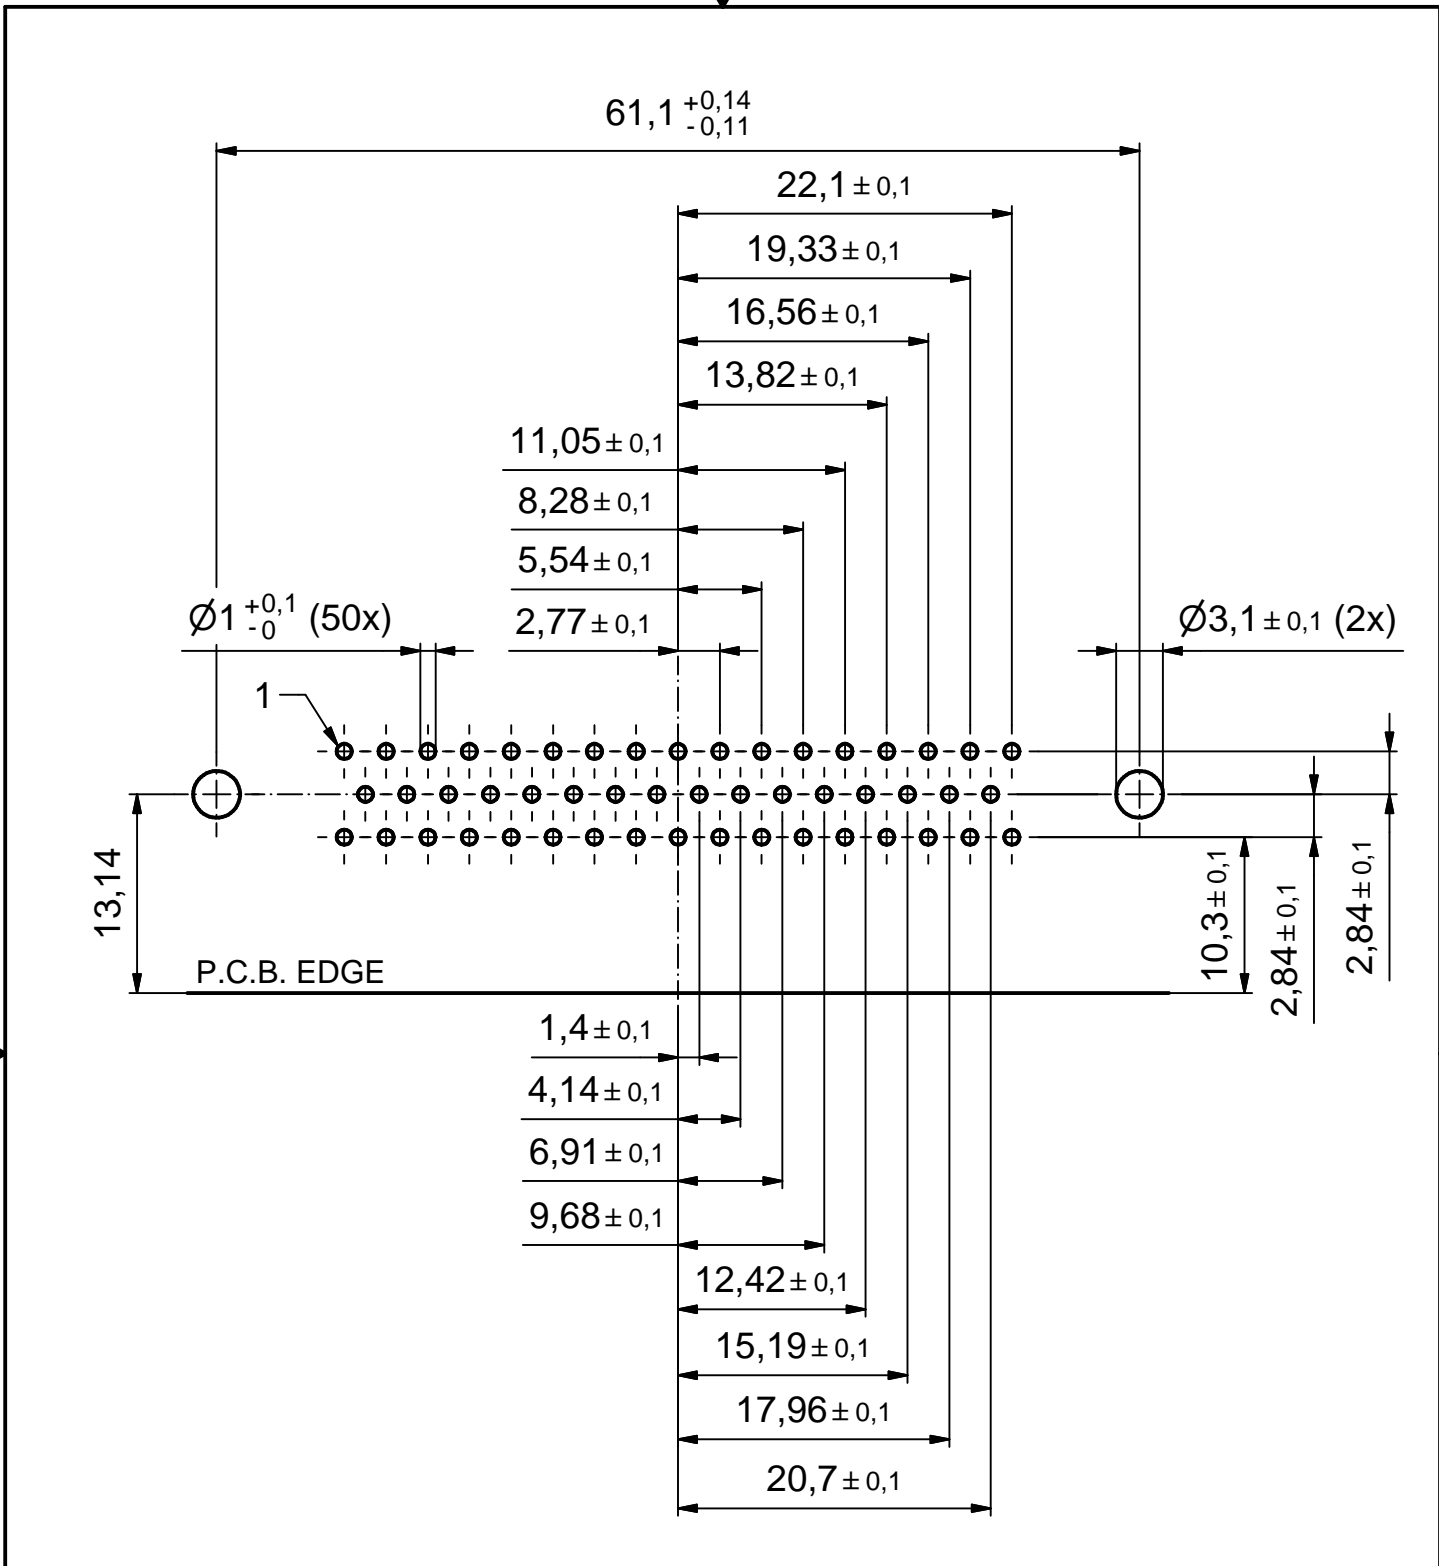

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		dim. in mm	scale: 2:1			
					material: SEE SHEET 1						
					date		name		P.C.B. HOLE DRILLINGS D-SUB MALE 90° 50pos. 0.370inch with mounting bracket and riveted insert		
					drawn	03.06.15	Lehmenkühler				
					appd.	03.06.15	Schmidt				
					norm						
					d-old			dwg no:		DIN-A4	
									16K1A3662		sh: 2
	a	Original							part no:		SEE SHEET 1
	rev.	description	date	name							