


Sensor Actor Line

M12x1 field attachable connectors with hex-nut threaded connection is coming soon

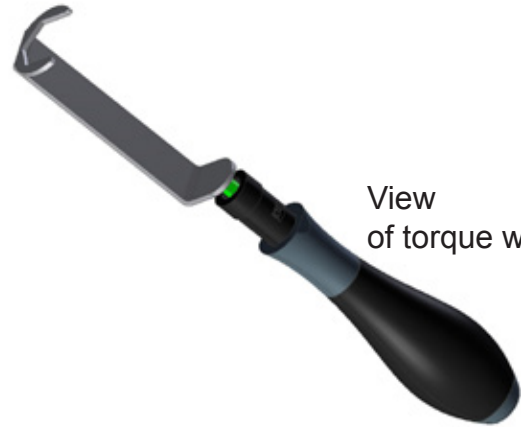

View of torque wrench

SAL: product change M12x1 field attachable

The coupling nut/-screw for the M12x1 field attachable connectors will get a new gripping surface in the form of a WS18 hex-ring at its front end area.

This makes it possible for the user to tighten down the connector to a defined torque even in difficult to reach areas.

The recommended torque is: 0.6Nm.

A special WS18 torque wrench is available for this purpose.

The above described product change is applicable to the following product families:

- Male/Female connector, A-coded, AWG18
- Male/Female connector, A-coded, shielded
- Male/Female connector, B-coded

Timing of the change: 4th quarter, 2010

